

Mercury




The Excel Mercury is a round luminaire with a flat diffuser manufactured from impact resistant and weatherproof materials, suitable for indoor and outdoor use. The various energy saving light sources and accessories enable many different installation solutions in both public and private buildings. Vandal resistant security screws are also available as an option.

- IP44
- Emergency versions available
- PIR versions also available (see PIR section)



Code	Lamp	Description
AVR1.28	1x28W TC-DD	28W 2D c/w switch start
AVR1.16	1x16W TC-DD	16W 2D c/w switch start
AVR1.9	2x9W TC	2x9W c/w switch start
AVR1.11	1x11W TC	11W c/w switch start
AVR1.18	1x18W TC-L	18W c/w switch start
AVR1.28ES	1x28W TC-DD	28W 2D c/w electronic starter
AVR1.28E	1x28W TC-DD	28W 2D c/w high frequency
FT/7WSBC	1x7W	Fitted 7W Pilot light
EC1/28W3M	1x28W TC-DD	28W 2D Maintained emergency - 185 Lumens
EC1/16W3M	1x16W TC-DD	16W 2D Maintained emergency - 157 Lumens
EC1/16W3NM	1x16W TC-DD	16W 2D Non-maintained emergency - 105 Lumens
EC1/9W/3NM	1x9W TC	9W Non-maintained emergency - 228 Lumens
EC1/2x9W3M	2x9W TC	2x9W Maintained

Decor ring	
White	AVL28
Brass	AVL28.1
Chrome	AVL28.2
Alumat	AVL28.6

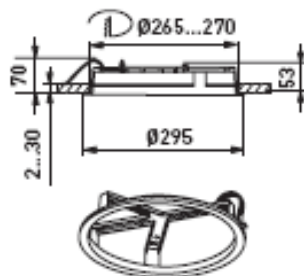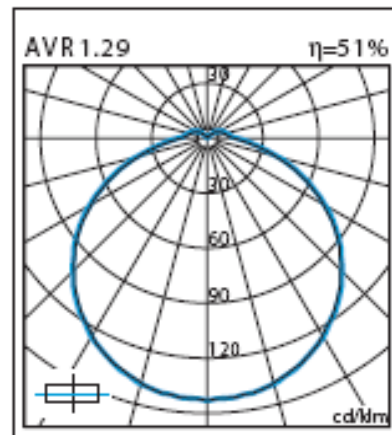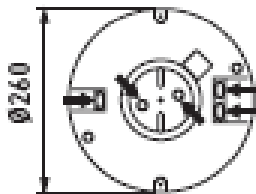

Recessing Frame
 White AVL21
 Brass AVL21B