

# Excel Croc

The Excel Croc is designed with today's commercial interior in mind. The reflector is a micro perforated basket which gives a combination of direct/indirect light.

A surface model is also available by adding the ATT02 which converts the recessed model to a surface unit.

- White powder coated metal body
- Suitable for recessed installation in 15mm/25mm exposed T-grid ceiling
- Perforated curved louvre with an opal inner lining for diffuse illumination
- Available with either Enstonet 3 Pole T bar connector and 3 Core 1.5mmsq 3m cable for looping between fittings, or 5 Pole T bar connector and 5 Core 1.5mmsq cable for dimmable products
- Emergency versions are also available



Name	Code	Description
Croc	AIDL240HF	2 x 40W HF PL Recessed
	AIDL240HFC	2 x 40W HF Dimmable Recessed
	AIDL255HF	2 x 55W HF PL Recessed
	AIDL255HFC	2 x 55W HF Dimmable Recessed


- 14W and 24W T5 models available on request
- ATT02—Surface Conversion

## Surface Conversion



OEM-ATT-02

## Dimensions

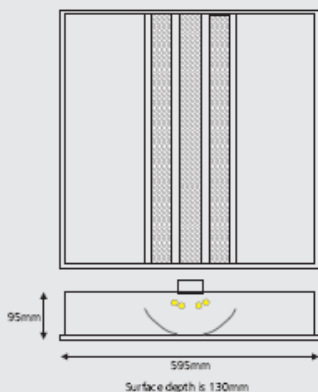

## Correction Factors

2x40W 1.0

IDL 255PZL 2x55W

ULOR	0.0%
DLOR	45.6%
LOR	45.6%
SHR NOM	1.75
SHR MAX	1.77

## Utilisation Factors UF(F)

SHR NOM 1.50

C	W	F	Room Index (K)								
			0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
70	50	20	NA	31	35	37	40	43	44	46	47
			NA	28	31	34	38	40	42	44	46
			10	NA	26	29	32	35	38	40	43
50	50	20	NA	31	34	36	39	41	42	44	45
			NA	28	31	33	37	39	41	43	44
			10	NA	25	29	31	35	37	39	41
30	50	20	NA	30	33	35	38	40	41	43	44
			NA	27	30	33	36	38	39	41	43
			10	NA	25	28	31	34	36	38	40
0	0	0	NA	24	27	29	33	35	36	38	40

Tested By  
**BSI**  
Product Services

