

Excel Croc 3

Designed for compatibility with today's interiors with a micro perforated drop basket reflector which gives added illuminance to the ceiling. It harnesses a combination of direct/indirect light to produce an efficient optical system.




- Energy efficient high frequency electronic control gear for visual comfort
- Suitable for installation in 15mm/25mm exposed T-grid ceiling
- Surface version available by adding ATT02 which converts the recessed model to a surface unit
- Available with either Enstonet 3 Pole T bar connector and 3 Core 1.5mmsq 3m cable for looping between fittings, or 5 Pole T bar connector and 5 Core 1.5mmsq cable for dimmable products
- Emergency version available

Name	Code	Description
Croc 3	AIDD240 HF	2 x 40W PLL HF
	AIDD240 HFC	2 x 40W PLL HF Dimmable
	AIDD255 HF	2 x 55W PLL HF
	AIDD255 HFC	2 x 55W PLL HF Dimmable




Dimensions

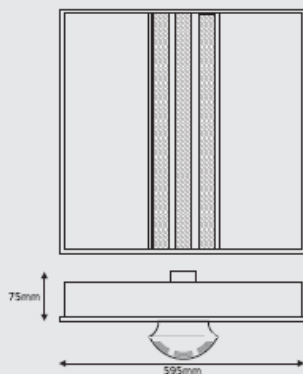

Correction Factors		LULOR	0.0%
2x40W	1.0	DLOR	45.6%
		LOR	45.6%
1DD255PZL	2x55W	SHR NOM	1.75
		SHR MAX	1.77

Utilisation Factors UF(F) SHR NOM 1.50

Reflectances %			Room Index (K)								
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
70	50	20	NA	31	35	37	40	43	44	46	47
	30		NA	28	31	34	38	40	42	44	46
	10		NA	26	29	32	35	38	40	43	44
50	50	20	NA	31	34	36	39	41	42	44	45
	30		NA	28	31	33	37	39	41	43	44
	10		NA	25	29	31	35	37	39	41	43
30	50	20	NA	30	33	35	38	40	41	43	44
	30		NA	27	30	33	36	38	39	41	43
	10		NA	25	28	31	34	36	38	40	42
0	0	0	NA	24	27	29	33	35	36	38	40



Tested By
BSI
Product Services