



Cressida

Cressida works on the principle; one lighting unit one office. Cressida combines indirect light with direct light. It is equipped with two pull-switches for individual control of uplight and downlight. Cressida is equipped with DP+R, a low luminous and efficient reflector louvre with a patented technique. Aluminium reflectors of a diffuse material and a total reflection of more than 90%. The luminaire is very suitable for use at display terminal workstations. Cressida 3963/28 NS is equipped with a presence sensor for increased comfort and lower power consumption.



Cressida Basic. Without dust cover and with white plastic pull switches.




DP+R diffuser, simple to remove to replace fluorescent lamps.

Cressida

IP 20 T5



Cressida Basic
Without dust cover and with
white plastic pull switches.

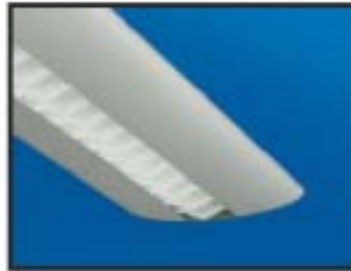


DP+R diffuser, simple to remove
to replace fluorescent lamps.



Cressida
Timeless with pure style ellipse shape.

Polar diagram

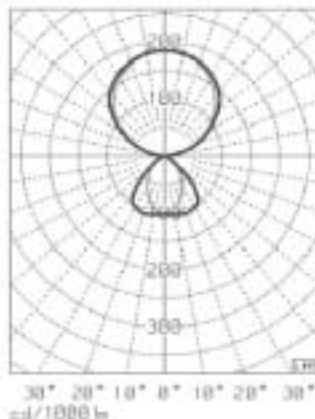

Cressida

Facts

Luminaire:

The body is made of natural anodised extruded aluminium with an insert of white enamelled sheet steel.

Reflector/louvre:

Double parabolic highly efficient reflector/diffuser DP+R, and blade baffle refraction (Patent 521 718)

Connection:

Top cable entry at one end-piece with mains cable and mains plug as standard equipment.

Installation:

Suspended from the ceiling by means of the enclosed wire suspension device, c/c 1200mm and 1500 mm respectively.

Miscellaneous:

Comes complete with T5 fluorescent lamps colour 830, and 2.5-m mains cable with a mains plug.

The luminaires are equipped with HF-ballast, warm start. Double pull switches are standard equipment.

Cressida Basic has no dust cover and comes with white plastic pull switches.

Cressida 3963/28 NS has a built-in presence sensor, that switches off the luminaire at a pre-set time after you have left the room and then switches on the light again when presence is detected.

Dimensions and weights

Effect	Length	Width	Height	Suspension c/c	Weight
2x28w	1216	240	54	1200	5,8kg
3x35w	1516	240	54	1500	6,4kg

All dimensions in mm.

Luminaire:

E70 255 00	Cressida 3963/28	3x28w T5
E70 255 01	Cressida 3963/28 NS	3x28w T5
E70 255 02	Cressida 3963/35	3x35w T5
E70 255 12	Cressida 3963/28 Basic	3x28w T5
E70 255 10	Cressida 3963/35 Basic	3x35w T5

Subject to changes of design and dimensions without notice.

• **Excel Lighting, The Arantex Building, Spiddal, Co. Galway** •
 Tel. (091) 553300 Fax. (091) 553373 Email. excellight@eircom.net
 • **Excel Group, Bluebell Avenue, Dublin 12** •
 Tel. (01) 4500600 Fax. (01) 4602178 Email. sales@excelelectric.ie